

Nastavek vijačni 1/2", inbus, izoliran

192/2HXVDEDP



Profili



standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Atributi izdelka

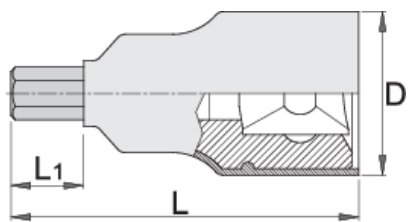
- material: glava: Premium Flex krom vanadijevo jeklo, kromirana
- material: vijačni nastavek: Premium Plus ogljikovo jeklo, protikorozijsko naoljen
- v celoti poboljššan
- v celoti izdelan v skladu s standardom DIN 7422 in EN IEC 60900




Prednosti:

- izoliran z dvoplastno - dvobarvno izolirno maso, s čimer je zagotovljena dodatna varnost
- kontrola s standardom EN IEC 60900

Pomembno!

- ko je vidna druga zaščitna plast, je potrebno zamenjati izolirano orodje z novim



		L	L1	D	
615173	4	76	8	27	76
615174	5	76	8	27	73
615175	6	76	8	27	80
615176	8	76	8	27	96
615177	10	76	8	27	110

* Slike proizvodov so simbolične. Vse dimenzije so v mm, masa v g. Vse navedene dimenzije lahko odstopajo v tolerančnih merah.