


# 外卡簧钳，弯

534/1P



## 配置文件

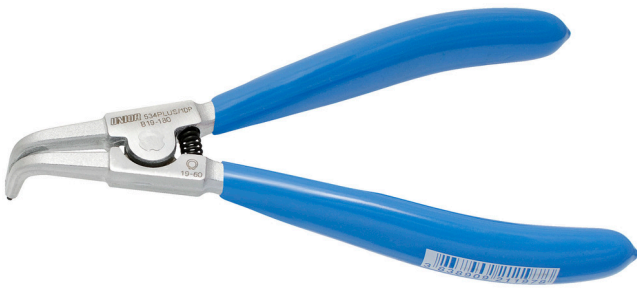

□□□□


- 材料: □□□性高□□
- 落□, 完全淬火与回火
- □□□□
- 表面□理: 依据ISO 1456:2009□□□□□□
- 尖端□黑□理
- 根据DIN5254□□□□B生□
- 浸塑料手柄

□□□

- 比便捷式卡簧□高出30%的耐用性
- 内嵌卡□
- dimension 300mm with standard tips
- 用于直径10至100mm

用途:



● 用于□上的装配卡簧

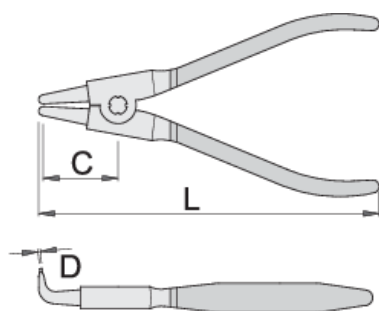


Barcode	Length	Spring Range	L	D	C	Weight
621195	140	3 - 10	128	0.9	28	134
621196	140	10 - 25	128	1.3	28	124
621197	180	19 - 60	166	1.8	38	204
621198	220	40 - 100	201	2.3	48	274
616737	300	85 - 140	280	3.2	68	502

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### 用途 (pictures)



尖端淬火至58 HRC以防止在移除或插入卡簧□□生弯曲或断裂



卡□角度□□以防止卡簧的掉落

### Related products

外卡簧□, 直□

内卡簧□, 直□

内卡簧□, 弯□