


内卡簧钳，弯口

538/1P



配置文件

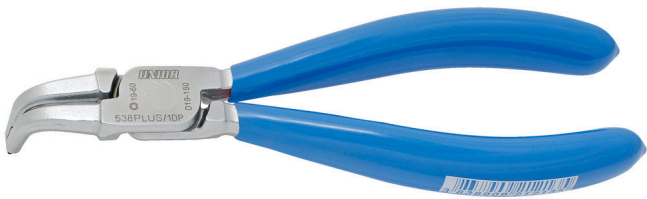

特性


- 材料：高韧性钢
- 淬火，完全淬火与回火
- 防锈
- 表面处理：依据ISO 1456:2009磷化
- 尖端黑化处理
- 浸塑塑料手柄
- 根据DIN 5256生产

优势

- 比便捷式卡簧钳高出30%的耐用性
- 用于直径8至100mm
- 内嵌卡簧
- dimension 300mm with standard tips

用途：



- 用于孔上的装配卡簧

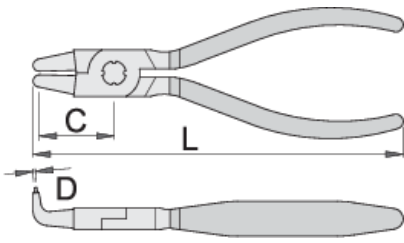


Barcode	Length (mm)	Weight (g)	L (mm)	D (mm)	C (mm)	Weight (g)
621211	140	8 - 13	128	0.9	28	114
621212	140	12 - 25	128	1.3	28	114
621213	180	19 - 60	166	1.8	38	194
621214	220	40 - 100	202	2.3	48	244
616743	300	85 - 140	295	3.2	68	501

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



尖端淬火至58 HRC以防止在移除或插入卡簧时产生弯曲或断裂



卡簧角度9°以防止卡簧的掉落

Related products

