

596/6A




配置文件





- 材料：切割器 - 特种工具、锻造、完全淬火与回火
- 独立感淬火切削刃
- 管状把手、上漆、重型塑料把手

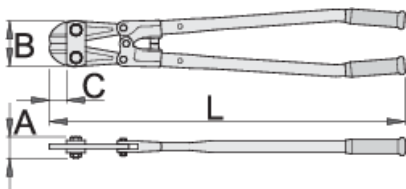


- 接口上的减震器可以少在切割加固杆出口在把手上的震
-



	L	A	B	C	
610963	300	26	40	16	737
610964	350	26	55	24	805
610965	450	34	70	36	1500

	L	A	B	C	
610966	600	38	84	40	2600
610967	750	43	96	46	3950
610968	900	47	109	50	6300
612984	1050	48	120	46	6900

cutting capacity (10N=1kg)


	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
610963	300	3	5
610964	350	3,5	5
610965	450	5	8
610966	600	7	10
610967	750	8	13
610968	900	9	16
612984	1050	10	19

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)




Photo (pictures)

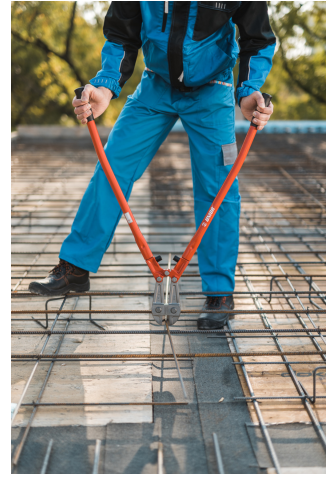



配件



Frequently asked questions

Can we eliminate the clearance between the blades of the bolt cutter?

Of course. The procedure is described in the instructions.