

Tournevis TBI électricien pour vis à fente

602TBI



Profils






Normes



DIN ISO 2380-1:2006 et DIN ISO 2380-2:2006

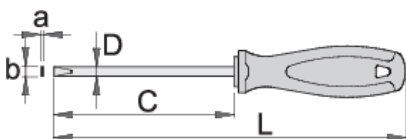Description produit

- Lame : acier Chrome Vanadium Premium Hard
- Lame chromée, extrémité brunie
- Poignée ergonomique TBI
- Manche tri-matières
- Trou pour suspension sur crochet




|  | axb | C | L | D |  |
|--|-----------|----|-----|-----|---|
| 612797 | 0.4 x 2.5 | 60 | 145 | 2.5 | 33 |
| 612798 | 0.4 x 2.5 | 75 | 160 | 2.5 | 33 |

|  | axb | C | L | D |  |
|---|-----------|-----|-----|-----|--|
| 611684 | 0.5 x 3.0 | 100 | 185 | 3 | 37 |
| 612799 | 0.5 x 3.0 | 150 | 235 | 3 | 39 |
| 612800 | 0.6 x 3.5 | 100 | 185 | 3.5 | 39 |
| 612801 | 0.8 x 4.0 | 100 | 185 | 4 | 43 |
| 611685 | 0.8 x 4.0 | 125 | 210 | 4 | 45 |
| 612802 | 0.8 x 4.0 | 150 | 235 | 4 | 48 |
| 612803 | 0.8 x 4.0 | 250 | 335 | 4 | 56 |
| 612804 | 1.0 x 5.5 | 125 | 225 | 5.5 | 75 |
| 611686 | 1.0 x 5.5 | 150 | 250 | 5.5 | 81 |
| 616843 | 1.0 x 5.5 | 280 | 380 | 5.5 | 103 |
| 612805 | 1.2 x 6.5 | 150 | 260 | 6.5 | 113 |
| 616844 | 1.2 x 6.5 | 280 | 390 | 6.5 | 145 |
| 612806 | 1.2 x 8.0 | 175 | 295 | 8 | 163 |

* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

Utilisation (pictures)

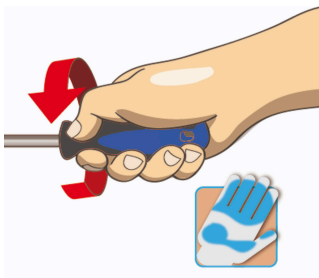

Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.

a file; make sure edges are straight.

- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.

- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

Safety (pictures)

