

Извлекувач со два крака на лизгање

683/2



Profiles




Product features

- материјал: тело од специјален флекс плус јаглороден челик, раце од специјален хром ванадиум челик
- кован, целосно појачан и кален
- завршна површина: хромирана според EN 12540, појачан среден навртувач
- за време на употреба краците цврсто се поставуваат близу до делот за вадење

Предности:

- со одвртување на краците, извлекувачот може да се користи како внатрешен или надворешен извлекувач

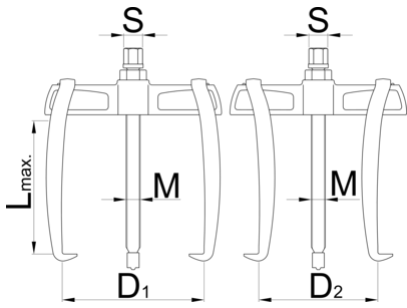

	№	L↑	D1	D2			M	S	
615076	60	90	65	50 - 90	25	2.5	M 10x1	13	325
615077	90	90	90	50 - 110	25	2.5	M 10x1	13	395
615078	130	140	130	80 - 140	50	5	M 14x1,5	17	1125
615079	180	140	180	80 - 180	50	5	M 14x1,5	17	1225
615080	250	195	250	130 - 250	75	7.5	M 22x2	24	4025
615081	350	195	350	130 - 350	75	7.5	M 22x2	24	4525

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Usage (pictures)



Spare parts

 Крак

 Вретено

Related products



Извлекувач со два крака












Извлекувач со два крака на лизгање



Извлекувач со три крака

Safety (pictures)



Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?

It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.