

iki sürgülü kollu çekirtme

683/2



Profiles




Product features

- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı, karartılmış vida
- levye mekanizmalı kısaçlar, sökülecek parçanın altına sıkıca oturur

Avantajları:

- kolların yönü değiştirilerek çekirme, iç ya da dış çekirme olarak kullanılabilir

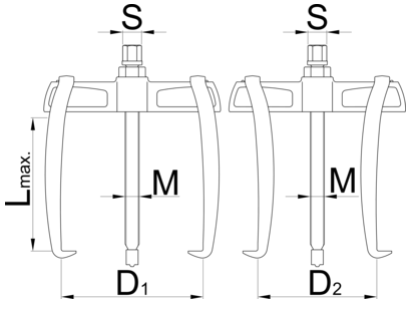

Barcode	No	L↑	D1	D2	F_{max} →	t_{max} →	M	S	Icon
615076	60	90	65	50 - 90	25	2.5	M 10x1	13	325
615077	90	90	90	50 - 110	25	2.5	M 10x1	13	395
615078	130	140	130	80 - 140	50	5	M 14x1,5	17	1125
615079	180	140	180	80 - 180	50	5	M 14x1,5	17	1225
615080	250	195	250	130 - 250	75	7.5	M 22x2	24	4025
615081	350	195	350	130 - 350	75	7.5	M 22x2	24	4525

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Usage (pictures)



Spare parts



Kol

Related products



İki ayarlanabilir kollu çektilme











iki sürgülü kollu çektilme



Üç ayarlanabilir kollu çektilme

Safety (pictures)



Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?

It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.