

# Univerzalni skidač remenica

2210/2A




## Profili



## Atributi proizvoda

- materijal: Premium Flex Plus ugljični alatni čelik
- u potpunosti poboljššan i ojačan
- površina: kromirana po ISO 1456:2009, srednji vijak bruniran
- za skidanje svih vrsta remenica (sa 2, 3, 4, 5, 6, 7, 8, 9 utora)
- Alat je dizajniran za demontažu pogonskih remenica sa žljebovima na čeonj strani. Alat demontira remenicu bez ikakvog rizika od oštećenja. Alat je podesiv za različite promjere remenica, jer su krakovi podešavajući.



621780

B

100

D

48 - 82

H


135




800

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.


## Upotreba (pictures)




Krake izvlača (3 kraka) postavljate u otvore remenice u skladu s brojem otvora na remenici. Npr.: ukoliko remenica ima 5 otvora, tri kraka postavljate u otvore izvlača koji su obilježeni brojem 5




Postavite krake izvlača u otvore remenice



Za pričvršćivanje izvlača na remenicu okrećite vreteno u smjeru kazaljke na satu dok se izvlač ne pričvrsti








Po završetku rada, uklonite izvlač



Može se koristiti za...



## Photo (pictures)

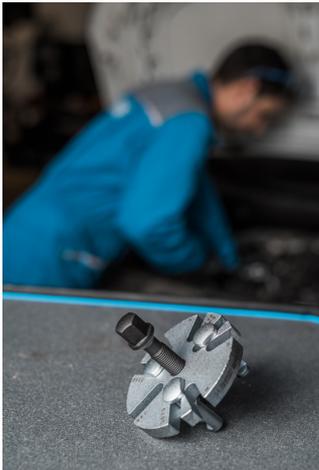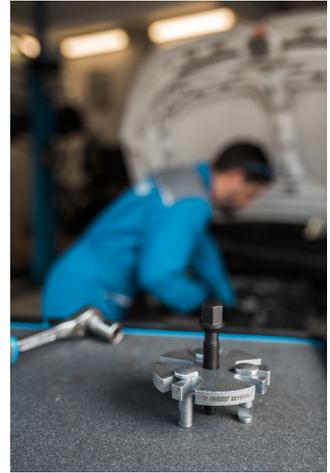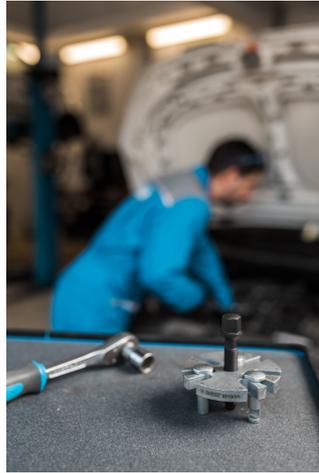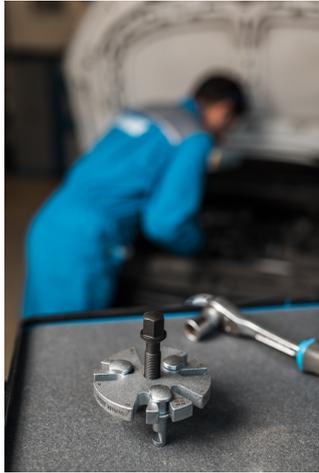

## Accessories



Univerzalni skidač remenica



Separator

## Rezervni dijelovi



Vreteno za 2210/2



Krak rezervni za 2210/2A

### Safety (pictures)

