

1689



配置文件



We redesigned many of its features. The base has been made stronger for improved precision and we also added conical one-size-fits-all magnetic thru-axles adapters that can be stored anywhere on the base. The arms have been made longer to accommodate 29+ wheels better and the calipers widened accordingly. Threads, springs and bearings were all revised resulting in smoother operation plus less frequent calibration. Additionally, we include white high-gloss stickers you can apply to the base and caliper arm to improve background contrast, making it easier than ever to use.

Here is a full list of the improvements.


- Stronger base for improved precision
- Longer and redesigned upright arms for improved clearance of 29+ wheels and truing precision
- Wider calipers for increased clearance of 29+ wheels
- Accommodates wider axles, works with through axle hubs up to 197mm width (include the use of adapters). Max. arm opening 230mm (without the use of adapters).
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Redesigned caliper tips for easier radial truing
- Revised threads and springs for smoother operation
- 8mm bench mount holes at the bottom, 268 mm center to center
- Slicker design, all black
- Comes with conical magnetic through axle adapters – one size fits all (12, 15 and 20). The adapters are now magnetic and can be affixed anywhere on the base. Features a bolt for more permanent fix on the upright arms.
- Includes white high gloss stickers, covering the base and caliper arm, for improved background contrast (stickers are not preapplied)

Compatibility:

- Accepts wheels from 16 to 29+ inch with or without tire.
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles

Standard features (same as before):

- 几何形状的卡尺能进行准确的向控制。
- 卡尺具有塑料涂层，防止标志刮掉。
- 采用直立旋可以垂直臂的位置，以便适合的度。卡臂的位置，以便适合的半径，卡尖端的距离，以便适合的度。
- 当更，簧加垂直臂和卡臂能快速拉开，当插入一个新，它会自回置位置。就能快速修整各种相同尺寸的。

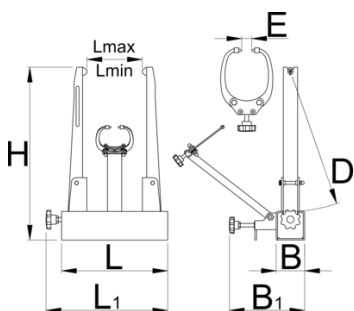



D↑

E↑

L↓

L↑

H

L

L1



629297

390

40

40

226

485






298

342


7165

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


用途 (pictures)



Accessories

 1689□□□□□□□□

 1689卡□


□□□□□□

 Cannondale Lefty® □□□□□□



胖胖卡搭配校正台使用。



Pro Truing Stand Wooden Base

配件



卡用的配件



Handle for 1689