

薄壁火花塞套筒 3/8"

3058/2





配置文件



□□□□

- 材料:□□□□□
- 表面处理:根据ISO 1456:2009□□□□□
- 落□, 完全淬火与回火
- 适用于没有足□的空□使用□准套筒扳手更□火花塞的□用情况
- 内插塞式橡□圈火花塞套筒

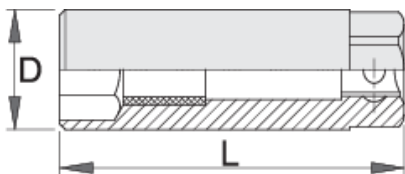

		D	L		
623215	16	20,9	65	19	80
623216	18	22,3	65	22	92
623217	21	25,6	65	19	111

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.