

# Surubelnita CR cu profil PH

615CR



## Profile




## Standarde

ISO 8764-1, 3

## Caracteristicile produsului

- lama:otel crom vanadium molibden tratata integral
- lama cromata, varful brunat
- maner:forma ergonomică
- maner-polipropilena
- gaura de agatare
- in concordanta cu standardul ISO 8764-1,2
- fabricat in acord cu standard DIN 5260-PH

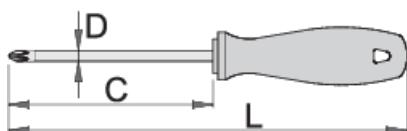

Barcode	+	C	L	D	Image
616363	PH 0	60	145	3	34
616364	PH 1	80	165	4.5	60



616365	PH 1	200	285	4.5	74
616366	PH 2	100	200	6	94
616367	PH 2	150	250	6	104
616368	PH 3	150	260	8	154
616369	PH 4	200	320	10	230

\* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

## Safety tips





- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

## Safety (pictures)



## Frequently asked questions

### **Poți lovi șurubelnita?**

Nu, nu ar trebui să loviți șurubelnita.

### **Poate fi folosita o surubelnita cu varf PH pentru suruburile cu amprenta PZ?**

Utilizarea sa nu este recomandată, deoarece acest lucru poate provoca deteriorarea surubului.