

# Lokma 1/4", uzun tip

188/2L6p



## Profiles




## Standards

ISO 2725-1

## Product features

- malzeme: krom vanadyum
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- ISO 2725-1 standardına göre yapılmıştır (yalnızca metrik boyut)

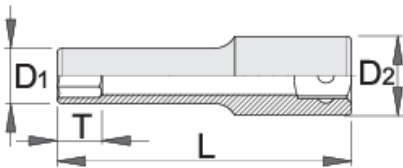

618697



3.2

L

50

D1

6

D2




12

T

8



20

		L	D1	D2	T	
616881	4	50	6.8	11.9	5	20
616882	4.5	50	7.1	11.9	5	20
616883	5	50	8	11.9	5	20
616884	5.5	50	8.3	11.9	5	20
616885	6	50	9.3	11.9	8	20
616886	7	50	10.5	11.9	8	31
616887	8	50	11,9	11.9	8	71
616888	9	50	13,1	13.1	11	71
616889	10	50	14,5	14.5	11	71
616890	11	50	15,8	15.8	11	71
616891	12	50	16,8	16.8	13	71
616892	13	50	17,8	17.8	13	71
616893	14	50	19,6	19.6	16	71

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

## Frequently asked questions

### **I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.