

# Socket 3/8", 12 point

238/1 12p



## Profiles

---



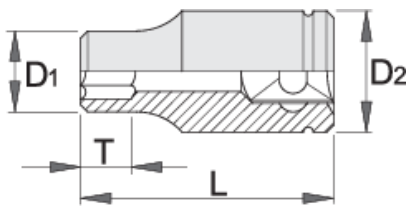
## Standards




---




ISO 2725 - 1

## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)



		L	D1	D2	T↑	
617122	6	28	10.2	16.9	8	28
616905	7	28	10.6	16.9	8	28
616906	8	28	11.8	16.9	8	29
616907	9	28	13.2	16.9	8	29
616908	10	28	14.5	16.9	8	30
616909	11	28	15.7	16.9	8	29
616910	12	28	16.9	16.9	8	28
616911	13	28	17.9	17.9	8	32
616912	14	28	19.6	17,9	12	39
616913	15	28	20,9	20,9	12	46
616914	16	30	21.9	21.9	12	48
616915	17	30	23.5	23.5	12	49
616916	18	30	24.7	21	12	65
616917	19	30	25.9	23	14	73
616918	20	32	27.2	24	14	86
616919	21	32	27.9	25	14	88
616920	22	32	29.7	26	14	105
616921	23	32	31.7	27	14	120
616922	24	32	31.9	28	16	112
616923	1/4"	28	10.2	16.9	8	28
616924	5/16"	28	11.8	16.9	8	29
616925	3/8"	28	14.5	16.9	8	30
616926	7/16"	28	15.7	16.9	8	29
616927	1/2"	28	17,9	17,9	8	32
616928	9/16"	28	19,7	19.7	12	39
616929	5/8"	30	21,9	21.9	12	48

		L	D1	D2	T↑	
616930	11/16"	30	23,5	23.5	12	59
616931	3/4"	30	25.9	23	14	73
616932	13/16"	32	27.9	25	14	88
616933	7/8"	32	29.5	26	14	105
616934	15/16"	32	31.9	28	14	112
616935	1"	32	33.9	30	14	132

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

### **I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.