

Clé à ergot articulée pour écrous à encoches latérales

255/2F

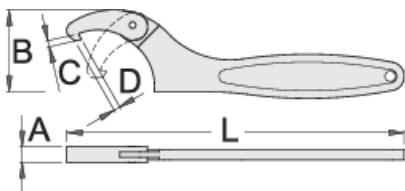





Profils



Description produit

- Matière : acier Chrome Vanadium Premium
- Entièrement traité thermiquement et trempé
- Finition chromée suivant la norme ISO 1456:2009



|  |  | L | C | D | A | B |  |
|--|---|-----|-----|-----|----|------|---|
| 615027 | 15 - 35 | 140 | 2,5 | 2,5 | 7 | 25 | 83 |
| 615028 | 35 - 50 | 201 | 4 | 4 | 10 | 41.5 | 196 |
| 615029 | 50 - 80 | 262 | 5 | 5 | 12 | 68 | 455 |
| 615030 | 80 - 120 | 320 | 5.5 | 5.5 | 14 | 86 | 829 |
| 615031 | 120 - 180 | 418 | 7.5 | 9 | 16 | 134 | 1768 |

* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

Utilisation (pictures)



Safety tips



● The correct force is only achieved when the hook wrench is used correctly.



- Don't hammer on a wrench handle.
- Don't use an extension on the handle.

Safety (pictures)

