

Вложка 3/8", удължена

238/1L6p



Профили




Стандарти

ISO 2725 - 1

Параметри на продукта

- материал: хром-ванадий
- ковани, изцяло закалени
- хромиран в съответствие със стандарт ISO 1456:2009
- полирана
- изработена в съответствие със стандарт ISO 2725-1 (само за метрични размери)

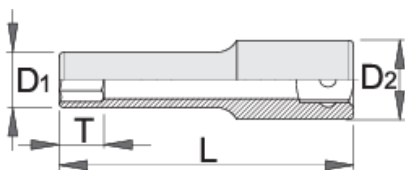

612036



8

L

63

D1

11.8

D2





16.8



9



55

		L	D1	D2		
612037	9	63	13.2	16.8	9	58
612038	10	63	14.5	16.8	9	61
612039	11	63	15.7	16.8	12	67
612040	12	63	16.8	16	12	75
612041	13	63	17.8	16.5	12	81
612042	14	63	19.55	17	15	91
612043	15	63	20.75	18	15	117
612044	16	63	21.75	19	15	107
612045	17	63	23.3	20	15	128
612046	18	63	24.5	21	18	112
612047	19	63	25.7	23	18	147
612048	20	63	27	24	18	157
612049	21	63	27.7	25	18	165
612050	22	63	29.5	26	21	200

* Снимките на продуктите са символични. Всички размери са в мм., теглото е в грамове .

Често задавани въпроси

Поставих вложка на пневматичния гайковерт и стената се спуска. Какво се обърка?

Когато работите с пневматични гайковерти задължително използвайте ударни IMPACT вложки.