

重型斜嘴

466/4G



配置文件

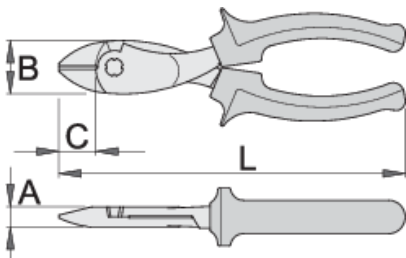




□□

DIN ISO 5749


□□□□

- 材料：特种工具□
- 落□，完全淬火与回火
- 切削刃感□淬火
- □□□□□□□□
- 表面□理：根据DIN12476□□□□□□□□□□
- 重型塑料把手
- 根据ISO5749□□□□□



	L	B	A	C	
617687	160	23.5	10	20.5	214
608700	180	28	11	20	313
609190	200	27	11	21	344

cutting capacity (10N=1kg)

	L	max 2150 N/mm ² Ø↑	max 650 N/mm ² Ø↑
617687	160	1,6	2,5
608700	180	1,8	3,0
609190	200	2,0	3,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Photo (pictures)

