

# Sečice kose

466/4G



## Profili

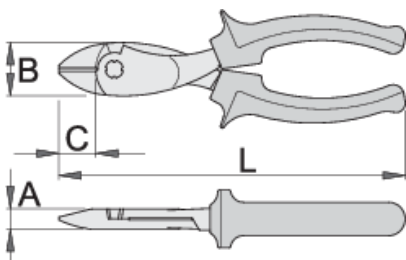




## Standardi

DIN ISO 5749


## Opis proizvoda

- materijal: premium plus alatni čelik
- kovane, potpuno poboljšane i ojačane
- rezne ivice induktivno kaljene
- čeljusti fino brušene
- površina fosfatirana ISO 9717
- robusne ručke obložene plastičnim navlakama
- izrađene prema standardu ISO 5749



	L	B	A	C	
617687	160	23.5	10	20.5	214
608700	180	28	11	20	313
609190	200	27	11	21	344

kapacitet sečenja (10N=1kg)

	L	max 2150 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
617687	160	1,6	2,5
608700	180	1,8	3,0
609190	200	2,0	3,5

\* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

## Slika (slike)

