

Odvrtač pneumatski 1.1/2"

1596



Profilii



Opis proizvoda

- broj obrtaja u slobodnom hodu: 3000/min
- max. obrtni moment: 3388 Nm
- max. pritisak vazduha: 6, 2 bara
- potrošnja vazduha: 410 l/min
- priključak za vazduh: 1/2"
- za vijke do M45

Prednosti:

- kontrolisani moment zavrtanja
- brzo zavrtanje
- širok spektar upotrebe


Upotreba:

- auto-industrija
- avio-industrija

- poljoprivredna mehanizacija
- teška industrija
- veće građevinske mašine
- brodogradnja
- individualna montaža

VAŽNO!

- UVEK koristite Uniorove IMPACT nasadne ključeve i pribor

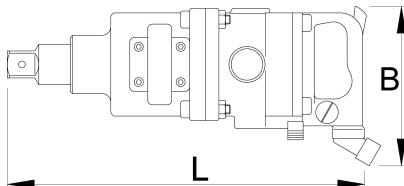

| | | | | | |
|--|--|---|---|--|--|
| | | B | L | | |
|--|--|---|---|--|--|

617690

1.1/2"

550

450

3388

17800

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Dodatna oprema



Pravilna upotreba



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always disconnect tools not in use from the air supply.

- Always use clean and dry air with the correct mixture of oil, for maximum tool life.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.

- All tools should be gently oiled prior to being stored.

- Always store pneumatic tools in dry places away from water.

- Always use original spare parts.

- Repairs can be performed only by authorised staff people authorised by Unior d.d.