

# Odvrtlač pneumatski 1.1/2"

1597



## Profili



## Opis proizvoda

- broj obrtaja u slobodnom hodu: 3000/min
- max. obrtni moment: 4065 Nm
- max. pritisak vazduha: 6, 2 bara
- potrošnja vazduha: 435 l/min
- priključak za vazduh: 1/2"
- za vijke do M52

## Prednosti:

- kontrolisani moment zavrtnja
- brzo zavrtnje
- širok spektar upotrebe


## Upotreba:

- auto-industrija
- avio-industrija

- poljoprivredna mehanizacija
- teška industrija
- veće građevinske mašine
- brodogradnja
- individualna montaža

## VAŽNO!

- UVEK koristite Uniorove IMPACT nasadne ključeve i pribor

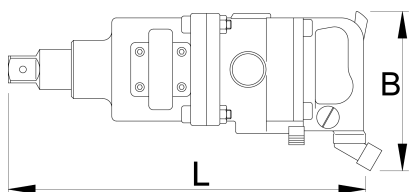

		<b>B</b>	<b>L</b>		
617691	1.1/2"	545	465	4065	18600

\* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

## Dodatna oprema



Spojnicica muška



Spojnicica ženska



Pripremna grupa za pneumatski alat 3/4"



Crevo spiralno za vazduh

## Pravilna upotreba



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.



- Always disconnect tools not in use from the air supply.

- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.