

# Disqueuse a renvoi d'angle

1517S



## Profils



## Description produit

- Vitesse à vide : 4500 tr/min
- Pression d'air maximum : 6, 2 bars
- Consommation d'air : 340 l/min
- Entrée d'air : 1/4"
- Filetage du mandrin : 5/8"

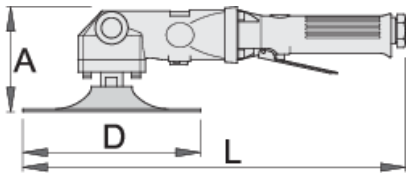
## Avantages :



- Outil de taille compacte
- Possibilité d'opérer à la fois de la main gauche ou droite
- Manche amovible
- Poignée marche/arrêt de sécurité

## Utilisation:

- Meulage de soudures
- Meulage d'angles

- Restauration de surfaces inégales



	<b>L</b>	<b>A</b>	<b>D</b>	
617729	375	100	175	2610

\* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

## Utilisation (pictures)



## Photo (pictures)



## Accessories



Embout fileté



Embout fileté



Raccord rapide fileté



Raccord rapide fileté



Régulateur, épurateur, lubrificateur 3/8"



Régulateur, épurateur, lubrificateur 1/2"



Tuyau pneumatique spiralé

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
  - Regularly clean and dry the air filters and inlet air supply.
  - Always use clean and dry air with the correct mixture of oil, for maximum tool life.
  - Check the joints and ensure that the tubes and other equipment are not damaged before use.
  - All tools should be gently oiled prior to being stored.
  - Always store pneumatic tools in dry places away from water.
  - Always use original spare parts.
  - Repairs can be performed only by authorised staff people authorised by Unior d.d.
- Always disconnect tools not in use from the air supply.