

Polizor pneumatic unghiular

1517S



Profile



Caracteristicile produsului

- viteza de rotatie 4500 rotatii/minut
- Presiunea maxima de aer comprimat: 6, 2 Bar
- consum de aer comprimat 340 l/min
- Racord de aer 1/4"
- racord filetat 5/8"

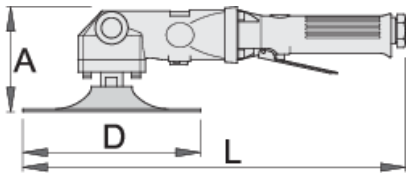
Avantaje:



- scula mica si compacta
- utilizabil atat pentru mana dreapta cat si pentru mana stanga
- maner interschimbabil
- maner rotitor

Utilizare

- curatirea sudurii
- curatirea zunelor ascutite

- curatirea suprafetelor mici accidentate



	L	A	D	
617729	375	100	175	2610

* Imaginea produsului este simbolica.Toate dimensiunile sunt exprimate în mm,greutatea în grame.

0 (pictures)



Photo (pictures)



Accessories



Cuplaj, partea tata



Cuplaj, partea tata



Cuplaj, partea mama



Cuplaj, partea mama



Filtru regulator si ungator pneumatic 3/8"



Filtru regulator si ungator pneumatic 1/2"



Furtun pneumatic elicoidal

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
 - Regularly clean and dry the air filters and inlet air supply.
 - Always use clean and dry air with the correct mixture of oil, for maximum tool life.
 - Check the joints and ensure that the tubes and other equipment are not damaged before use.
 - All tools should be gently oiled prior to being stored.
 - Always store pneumatic tools in dry places away from water.
 - Always use original spare parts.
 - Repairs can be performed only by authorised staff people authorised by Unior d.d.
- Always disconnect tools not in use from the air supply.