

Socket 1/2", long type, 12 point

190/1L12p



Profiles




Standards

ISO 2725 - 1

Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)

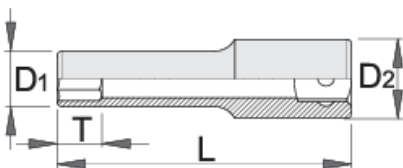

610762



10

D1

15

D2

22

L




77

T↑

12



85

|  |  | D1 | D2 | L | T↑ |  |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------|------|----|----|------------------------------------------------------------------------------------|
| 610763 | 11 | 16.3 | 22 | 77 | 12 | 110 |
| 610764 | 12 | 17.6 | 22 | 77 | 12 | 100 |
| 610765 | 13 | 18.8 | 22 | 77 | 12 | 107 |
| 610766 | 14 | 20.4 | 22 | 77 | 15 | 112 |
| 610767 | 15 | 21.6 | 20.7 | 77 | 15 | 107 |
| 610768 | 16 | 22.9 | 21.5 | 77 | 15 | 121 |
| 610769 | 17 | 24 | 22 | 77 | 15 | 130 |
| 610770 | 18 | 25.4 | 23 | 77 | 18 | 150 |
| 610771 | 19 | 26 | 21 | 77 | 18 | 140 |
| 610772 | 20 | 27.9 | 24 | 77 | 18 | 176 |
| 610773 | 21 | 28 | 25 | 77 | 18 | 166 |
| 610774 | 22 | 30 | 26 | 77 | 21 | 197 |
| 610775 | 23 | 31.6 | 27 | 77 | 21 | 226 |
| 610776 | 24 | 32 | 28 | 77 | 24 | 223 |
| 610777 | 27 | 36 | 30 | 77 | 27 | 277 |
| 610778 | 30 | 40 | 34 | 77 | 30 | 317 |
| 610779 | 32 | 42 | 36 | 77 | 33 | 335 |
| 610780 | 3/8" | 15 | 22 | 77 | 12 | 85 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.