


# Hex socket 1/2"

192/2HX




## Profiles

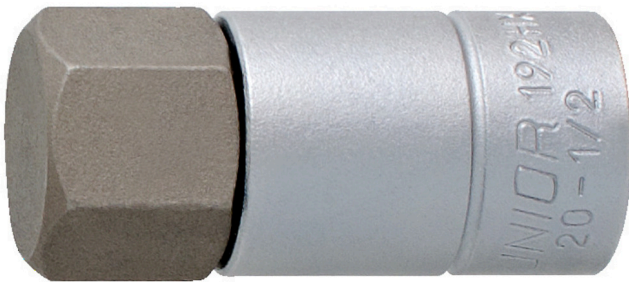

## Product features

- material (Socket): Premium flex chrome vanadium steel
- material (Bit): Premium plus carbon steel
- entirely hardened and tempered
- dimensions 17, 19, 22, 24 are used for the removal and fitting of front wheels
- made according to standard DIN 7422 (only metric dimension)

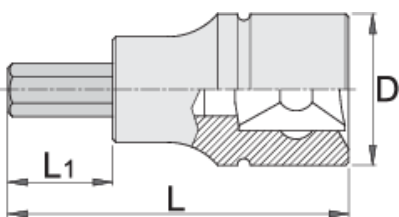

600978



4

D

23

L




60

L1

24



60

		D	L	L1	
603420	5	23	60	24	60
603421	6	23	60	24	60
603422	7	23	60	24	75
603423	8	23	60	24	81
605923	9	23	60	24	85
603424	10	23	60	24	95
603425	12	23	60	24	116
624033	13	23	60	24	100
603426	14	23	60	24	168
624034	15	23	60	24	115
603427	17	24	60	20	187
603428	19	26.5	60	20	195
623141	22	26,5	60	20	196
623142	24	26,5	60	20	210
619894	3/16"	22.9	40	24	60
619895	7/32"	22.9	40	24	60
619896	1/4"	22.9	40	24	60
619899	3/8"	22.9	40	24	95
619900	1/2"	22.9	40	24	116
619901	9/16"	22.9	40	24	168
619902	5/8"	22.9	40	24	187
619904	3/4"	26.8	40	21	195

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Usage (pictures)

