

Slagmoerdopsleutel 1/2", inbus

231/4AHX

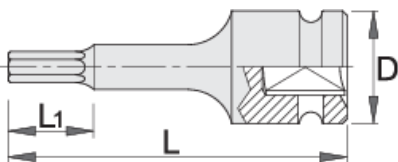


Profielen






Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717



| Barcode | Hex Size | D | L | L1 | Weight |
|---------|----------|----|----|----|--------|
| 615218 | 5 | 25 | 75 | 15 | 85 |
| 615219 | 6 | 25 | 75 | 15 | 93 |
| 615220 | 8 | 25 | 75 | 25 | 95 |
| 615221 | 10 | 25 | 75 | 25 | 114 |
| 615222 | 12 | 25 | 75 | 25 | 130 |

|  |  | D | L | L1 |  |
|---|--|----|----|----|--|
| 615223 | 14 | 25 | 75 | 25 | 148 |
| 615224 | 17 | 25 | 75 | 25 | 183 |
| 615225 | 19 | 25 | 75 | 25 | 207 |

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veiligheid (Afbeeldingen)

