

# 斜嘴

461/1VDEDP



## 配置文件



□□

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

□□□□


- 材料：特种工具□
- 落□，完全淬火与回火
- 切削刃感□淬火
- □□□□
- 表面□理：依据ISO 1456:2009□□□□□□
- 根据ISO 5749□□□EN IEC 60900生□

□□□

- 通□双□涂料□□的把手 —— 提供□外安全的双色□□保□

重要事□！

- 如果第二□□露出来, □立即更□您的VDE工具

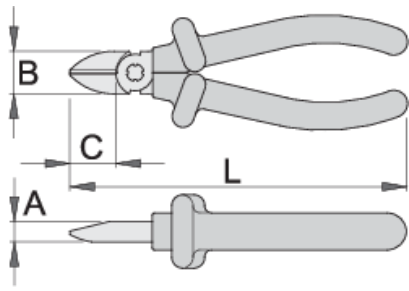


Barcode	L	B	A	C	Weight
619193	140	19	9.5	18	174
619194	160	22.5	10	22	224

cutting capacity (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
619193	140	1,6	2,0
619194	160	1,6	2,5

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



## Photo (pictures)



## Frequently asked questions

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.