

Alicate pelacables aislado

478/1VDEDP



Perfiles



Normas

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Características del producto

- Material: composición especial para temple y endurecimiento
- totalmente templado y revenido
- filos templados por inducción
- cabezas pulidas
- capacidad de pelado: de 0, 6 mm² - 10 mm²
- fabricado completamente de acuerdo con EN IEC 60900


Ventajas:

- mangos aislados con dos capas - masa aislante de dos colores – con lo cual se garantiza una seguridad adicional

- muelle para reapertura

Importante!

- cuando es posible ver la segunda capa es necesario cambiar la herramienta por una nueva

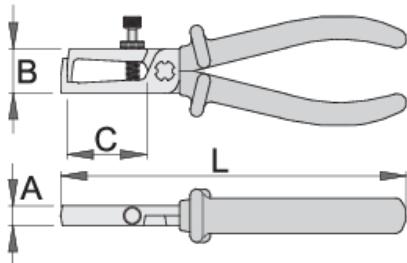


	L		B	A	C	
--	---	--	---	---	---	--

619186	160	0.6 - 10	18	9	40	167
--------	-----	----------	----	---	----	-----

* Las imágenes de los productos son simbólicos. Todas las dimensiones son en mm, peso en gramos.

Empleo (imágenes)



Preguntas frecuentes

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.