

# Pinza spellafili

478/1VDEDP



## Profili



## Standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Attributi del prodotto

- materiale: acciaio al carbonio plus premium
- interamente bonificato
- bordi di taglio induriti a induzione
- teste lucidate
- capacità di spellatura: fino a 0,6-10 mm<sup>2</sup>
- conforme allo standard EN IEC 60900


## Vantaggi:

- impugnatura bicomponente - bicolore isolata, per una doppia sicurezza

- molla di riapertura

## Importante!


- se è visibile il secondo strato, sostituite il vostro attrezzo VDE con uno nuovo

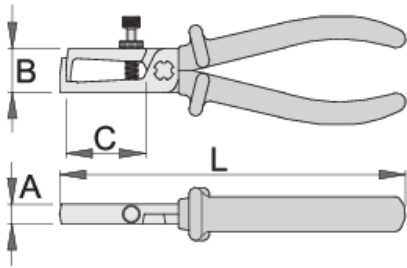

Barcode	L	mm <sup>2</sup>	B	A	C	Weight
619186	160	0.6 - 10	18	9	40	167

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Utilizzo (pictures)



## Frequently asked questions

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.