

直尖嘴钳，剪切和管功能

508/1VDEDP



配置文件



□□

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

□□□□

- 材料：特种工具钢
- 落刃，完全淬火与回火
- 切削刃感钢淬火
- □□□□
- 表面处理：依据ISO 1456:2009□□□□□□
- 根据ISO 5745□□□EN IEC 60900生□


□□□

- 通□双□涂料□□的把手 —— 提供□外安全的双色□□保□
- 也可用于□持和分离□□或其他精□表面的物体

- □□□□□

重要事□！

- 如果第二□□露出来，□立即更□您的VDE工具

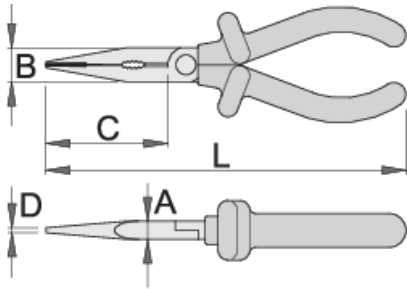

Barcode	L	B	D	A	C	Weight
619189	170	17	2.5	9	61	162
619190	200	17	2.5	9	77	201

cutting capacity (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
619189	170	1,6	2,0
619190	200	1,8	2,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.