

# 弯曲尖嘴钳，剪切和管功能

512/1VDEDP



## 配置文件



## 特性


- 材料：特种工具钢
- 淬火，完全淬火与回火
- 切削刃感淬火
- 绝缘
- 表面处理：依据ISO 1456:2009磷化
- 根据ISO 5745符合EN IEC 60900生产

## 规格

- 通孔双涂层把手 —— 提供额外安全的双色保护
- 符合ISO 1456:2009磷化
- 符合ISO 5745
- 开口45°
- 符合EN IEC 60900

## 重要事项！

- 如果第二個露出來，立即更換您的VDE工具

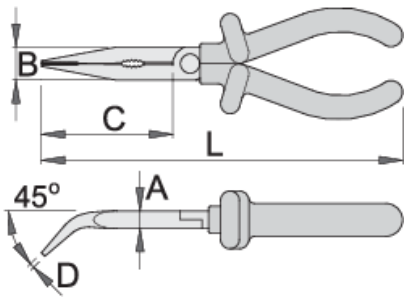


Barcode	L	B	D	A	C	Weight
619191	170	17	2.5	9	61	156
619192	200	17	2.5	9	77	201

cutting capacity (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
619191	170	1,6	2,0
619192	200	1,8	2,5

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



## Frequently asked questions

### Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

### Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

### Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

**Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.