

Kombine penseler

406/4G



Profiles






Standards

ISO 5746


Product features

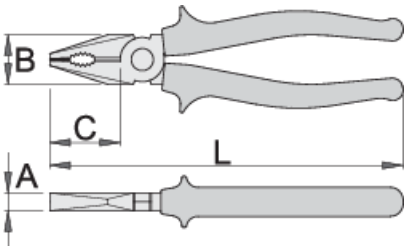- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlı endüksiyonla sertleştirilmiş
- başlık yüzey bitirme: ince taşlanmış
- yüzey bitirme: ISO 9717 standardına göre fosfat kaplamalı
- ağır hizmet tipi plastik saplar
- ISO 5746 standardına göre yapılmıştır




	L	B	C	A	
608673	140	23	32	8	157
608674	160	24	35	9.5	224
608675	180	27	38	10	274
608676	200	29	41	10.5	341
608677	220	32	47	11	421

kesme kapasitesi (10N=1kg)

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
608673	140	1,6	2,0
608674	160	1,6	2,0
608675	180	1,8	2,5
608676	200	2,0	2,5
608677	220	2,0	3,0

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Usage (pictures)

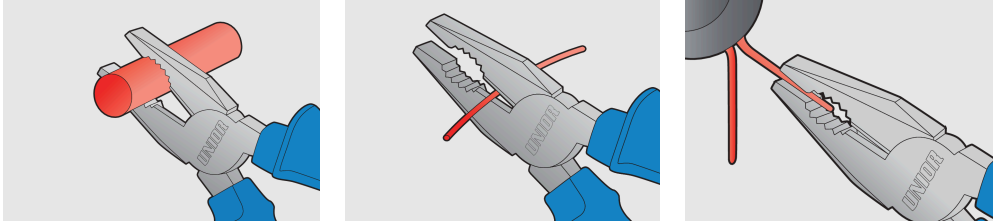

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
 407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.