

Tronchese multifunzione a tagliente diagonale

462/1BI



Profili




Attributi del prodotto

- materiale: acciaio al carbonio plus premium
- bordi di taglio induriti a induzione
- teste lucidate
- finitura superficiale: cromata ISO 1456:2009
- robusta impugnatura bicomponente

Vantaggi:

- **Per spellare fili isolati dei singoli conduttori 1,5 mm² e 2,5mm²**

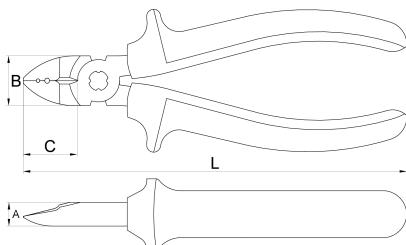



L

B

A

C



624059

160

21

10

22

211

capacità di taglio

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
--	---	-------------------------------	------------------------------

624059

160

1,6

2,5

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Frequently asked questions

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.