



1783/1 6P



## 配置文件

---




□□□□

- 材料: □□□性□□□
- 落□, 完全淬火与回火
- 表面□理: 根据ISO 1456:2009□□□□
- 抛光

## 用途:

- 在自行□□挂叉上使用扁形插座, 上面有低而□固的螺母

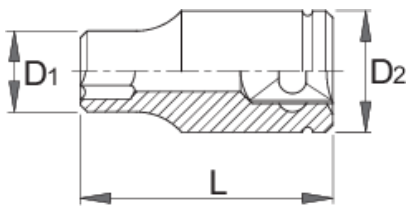

Barcode	mm	L	D1	D2	T↑	Weight
625716	23	38	26	31,8	12	128
624214	24	40	33	28	14	126
624215	26	40	35,3	30	14	141
624216	27	41	37	30	16	146
624217	28	41	38	31	18	158
624218	30	44	40,5	34	20	215
624219	32	44	43	36	20	233

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)

