

直尖嘴钳，剪切功能

506/1BI



配置文件




□□

DIN ISO 5745

□□□□

- 材料：特种工具□
- 落□，完全淬火与回火
- 切削刃感□淬火
- □□□□
- 表面□理：依据ISO 1456:2009□□□□□□
- 重型双成分材料手柄
- □□□□□
- 根据ISO5745□□□□
- 也可用于□持和分离□□或其他精□表面的物体

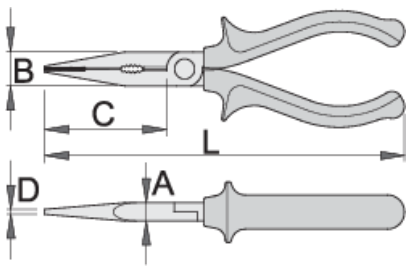

	L	B	D	A	C	
607874	140	15	2	8	39	115
607875	160	16	2.5	9	49	137

cutting capacity (10N=1kg)

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
607874	140	1,6	2,0
607875	160	1,6	2,0

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Photo (pictures)



Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
 407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.