

# Kliješta mehaničarska, ravna

508/1BI



## Profili

---




## Zatvori pretraživanje

---

DIN ISO 5745

## Atributi proizvoda

- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robusne ručke izolirane dvokomponentnim navlakama
- nazubljena stezna površina
- izrađeno po standardu ISO5745
- koriste se i za stiskanje i odvajanje od kablova i drugih osjetljivih dijelova

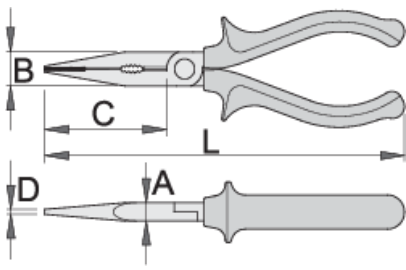

Barcode	L	B	D	A	C	Icon
607876	170	17	2.5	9	61	156
607877	200	17	2.5	9	77	191

sposobnost rezanja (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
607876	170	1,6	2,0
607877	200	1,8	2,5

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

**The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?**  
 407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.