

直尖嘴钳，剪切和管功能

508/4G



配置文件




□□

DIN ISO 5745

□□□□

- 材料：特种工具□
- 落□，完全淬火与回火
- 切削刃感□淬火
- □□□□□□□□
- 表面□理：根据DIN12476□□□□□□□□□□
- 重型塑料把手
- □□□□□□
- 根据ISO5745□□□□□
- 也可用于□持和分离□□或其他精□表面的物体

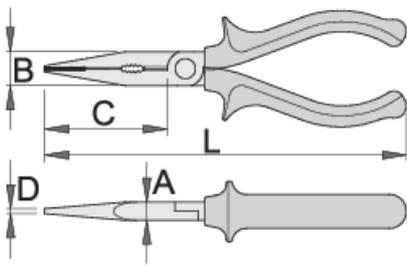

Barcode	L	B	D	A	C	Weight
608710	170	17	2.5	9	61	156
608711	200	17	2.5	9	77	191

cutting capacity (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
608710	170	1,6	2,0
608711	200	1,8	2,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.