


弯嘴钳，剪切和管功能

512/1BI




配置文件

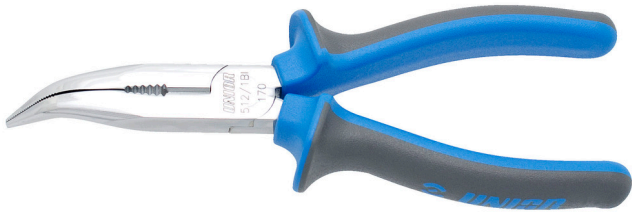

□□□□

- 材料: □□高□□
- 落□, 完全淬火与回火
- 切削刃感□淬火
- □□□□
- 表面□理: 根据ISO 1456:2009□□□□
- 重型双成分材料手柄
- □□□□□
- □□□□45°
- □□□□□□□□□□□□□□□□□□□□□□
- □□□□□□□□□□□□□□□□
- 根据ISO5745□□□□□

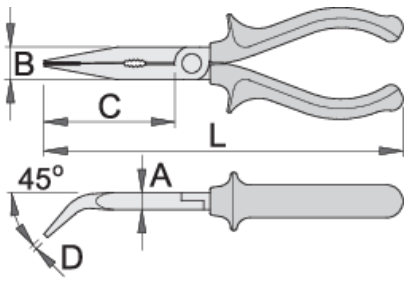


	L	B	D	A	C	
607966	170	17	2.5	9	61	152
607967	200	17	2.5	9	77	204

cutting capacity (10N=1kg)

	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
607966	170	1,6	2,0
607967	200	1,8	2,5

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?

407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.