

# Kliješta mehaničarska, kosa

512/4G




## Profili

---



## Atributi proizvoda

- materijal: Premium plus alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- nazubljena stezna površina
- čeljusti zakrivljene pod kutem od 45°
- robusne plastične navlake za ručke
- duge, savijene čeljusti omogućuju jednostavan i precizan prihvat matica i vijaka
- robusne čeljusti kliješta omogućuju dobar prihvat

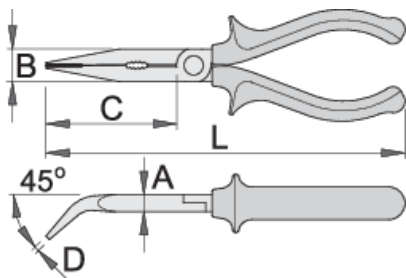


	L	B	D	A	C	
608720	170	17	2.5	9	61	152
608721	200	17	2.5	9	77	204

sposobnost rezanja (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
608720	170	1,6	2,0
608721	200	1,8	2,5

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Upotreba (pictures)



## Frequently asked questions

**The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?**  
 407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.