

Diagonalseitenschneider

461/1BI



Profile




Standards

DIN ISO 5749

Produkteigenschaften

- Material: Premium Plus Kohlenstoffstahl
- gesenkgeschmiedet, vollkommen gehärtet und vergütet
- Schneiden induktiv gehärtet
- Kopf poliert
- verchromt gemäß EN12540
- Zweikomponentengriffe mit Abgleitschutz
- Gefertigt gemäß ISO 5749 und EN 60900

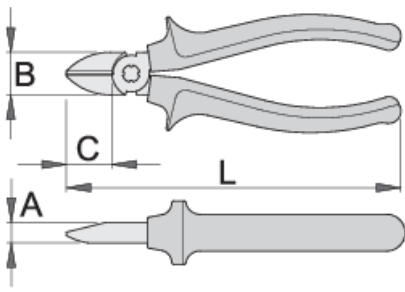


Barcode	L	B	A	C	Weight
607883	140	19	9.5	18	169
607884	160	22.5	10	22	214

Schneidwerte (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
607883	140	1,6	2,0
607884	160	1,6	2,5

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

Verwendung (Bilder)

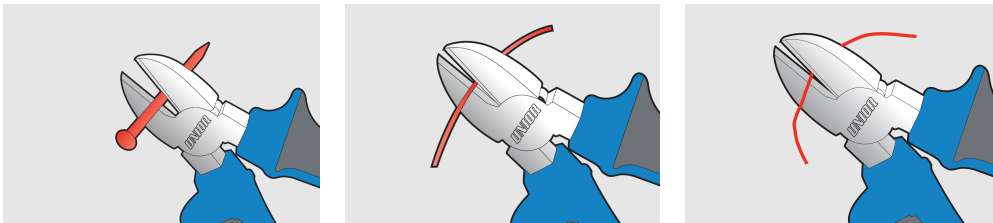

Häufig gestellte Fragen

What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRC, while head parts are additionally inductively hardened to a hardness of at least 60HRC.

What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.