

# Kliješta za sječenje žice, kosa

461/1BI



## Profili

---




## Zatvori pretraživanje

---

DIN ISO 5749

## Atributi proizvoda

- materijal: Premium Plus ugljični čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robusne ručke izolirane dvokomponentnim navlakama
- izrađeno po standardu ISO5749

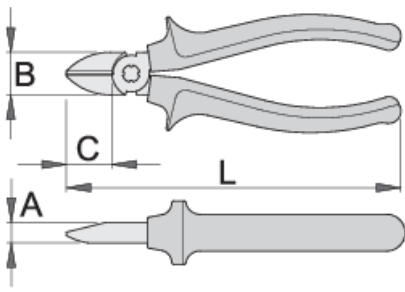


Barcode	L	B	A	C	Icon
607883	140	19	9.5	18	169
607884	160	22.5	10	22	214

sposobnost rezanja (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
607883	140	1,6	2,0
607884	160	1,6	2,5

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## upotreba (pictures)

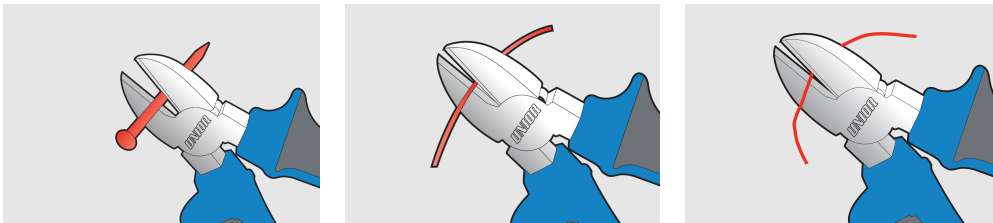

## Frequently asked questions

### What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRC, while head parts are additionally inductively hardened to a hardness of at least 60HRC.

### What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.