

# Tronchese a tagliente diagonale

461/1BI



## Profilo




## Standard

DIN ISO 5749

## Attributi del prodotto

- materiale: acciaio al carbonio plus premium
- interamente bonificato
- bordi di taglio induriti a induzione
- teste lucidate
- finitura superficiale: cromata ISO 1456:2009
- robusta impugnatura bicomponente
- conforme allo standard ISO 5749

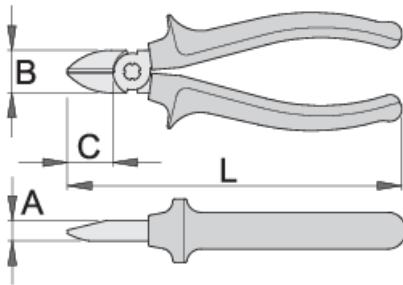


Barcode	L	B	A	C	Image
607883	140	19	9.5	18	169
607884	160	22.5	10	22	214

capacità di taglio (10N=1kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
607883	140	1,6	2,0
607884	160	1,6	2,5

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Utilizzo (pictures)

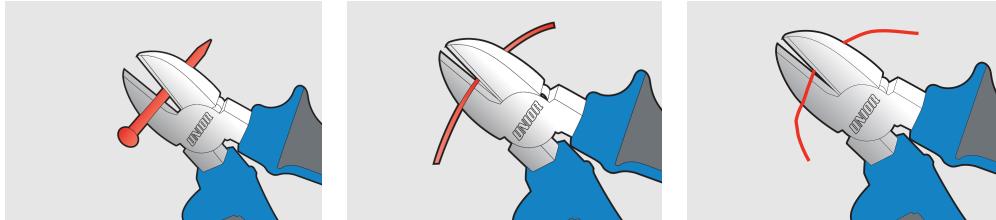

## Frequently asked questions

### What does it mean that the pliers are quenched and tempered and the head parts/teeth of the pliers are inductively hardened?

It means that the pliers are thermally processed by quenching and tempering their entire surface to a hardness of about 45HRc, while head parts are additionally inductively hardened to a hardness of at least 60HRc.

### What is meant by the statement that pliers are made in accordance with the stated ISO standard?

It means that the pliers are in accordance with the international standard in terms of dimensions, strength and structure, and compliance is determined by prescribed tests.