

Ključ podešavajući, za siguran rad na visini

250/1-H



Profil




Atributi proizvoda

- Materijal: Premium krom-vanadij
- Kovan, u cijelosti ojačan i zakaljen
- kromirani (ISO 1456:2009)
- Polirane glave
- Sa mjernom skalom
- Izrađen prema standardu ISO 6787

Prednosti:

- na svakom je alatu označena težina alata

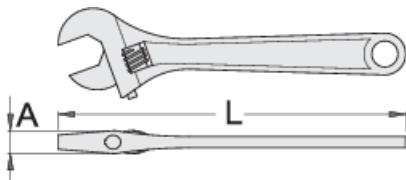



L

A



| | | | | | | |
|--------|-----|-----|-------|------|----|------|
| 626106 | 200 | 8" | 205 | 14,4 | 28 | 272 |
| 626107 | 250 | 10" | 254 | 16,9 | 32 | 458 |
| 626108 | 300 | 12" | 303,5 | 19,1 | 38 | 709 |
| 626109 | 380 | 16" | 375 | 23,8 | 50 | 1309 |
| 626162 | 450 | 18" | 458,5 | 26,3 | 60 | 1725 |

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)



Pričvrstite karabiner na remenu za vezivanje na kopču alata. Kopče su dovoljno velike da drže 2 karabinera.



Karabiner se mora osigurati od otvaranja zatezanjem matice.



Prije skidanja alata s remena, odvrnite maticu na karabineru.



Otkopčajte karabiner na remenu i uklonite alat pričvršćen za užicu. Alat je sada spremjan za rad.



Na slici je prikazan pravilno pričvršćen alat na remenu za vezivanje s kojim koristimo alat.



Pritisnite iglu u rupu s alatom za rastavljanje nasadnog ključa (stavka 1111), te istovremeno uklonite nasadni ključ sa račne i zamijenite nasadni ključ ili nastavak.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach

- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.

to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring