

# Ključ okasti udarni, za siguran rad na visini

184/7-H



## Profili


**Premium** 

## Atributi proizvoda

- materijal: Premium poseban alatni čelik
- kovan, u cijelosti ojačan i zakaljen
- završna obrada: antikorozivni premaz uljem
- izrađeni prema standardu DIN 7444 (samo metričke dimenzije)

## Prednosti:

- kovana metalna kopča koja se ne može rastaviti
- na svakom je alatu označena težina alata
- u kopču je moguće učvrstiti dva karabina, što omogućuje sigurnu zamjenu alata
- Alat Unior je prilagođen radu na visini i održava osnovne funkcije alata

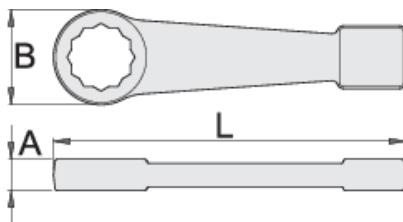

	mm	L	B	A	
626344	24	180	48,6	16	579
626345	27	180	48,6	16	555
626346	30	180	48,6	16	532
626347	32	190	58,4	18	762
626348	36	190	58,4	18	745
626349	41	235	74	22	1466
626350	46	235	74	22	1397
626351	50	235	74	22	1329
626360	1.1/16"	180	49	16	550
626361	1.1/8"	180	49	16	549
626363	1.1/4"	190	58	18	775
626364	1.5/16"	190	58	18	763
626365	1.3/8"	190	58	18	748
626366	1.7/16"	190	58	18	722
626367	1.1/2"	235	74	22	1484
626368	1.5/8"	235	74	22	1477
626369	1.11/16"	235	74	22	1477
626370	1.3/4"	235	74	22	1407
626371	1.13/16"	235	74	22	1414
626372	1.7/8"	235	74	22	1398
626373	2"	235	74	22	1323

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## upotreba (pictures)



Pričvrstite karabiner na remenu za vezivanje na kopču alata. Kopče su dovoljno velike da drže 2 karabinera.



Karabiner se mora osigurati od otvaranja zatezanjem maticice.



Prije skidanja alata s remena, odvrnite maticicu na karabineru.



Otkopčajte karabiner na remenu i uklonite alat pričvršćen za užicu. Alat je sada spremjan za rad.



Na slici je prikazan pravilno pričvršćen alat na remenu za vezivanje s kojim koristimo alat.



Pritisnite iglu u rupu s alatom za rastavljanje nasadnog ključa (stavka 1111), te istovremeno uklonite nasadni ključ sa račne i zamijenite nasadni ključ ili nastavak.

## Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

## Safety (pictures)



## Frequently asked questions

### **Can we use a tool for working at height as a normal tool?**

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

### **Does the stated weight per tool for safe work at height also include the weight of the metal ring?**

The weight of the tool marked on the tool, included also weight of metal ring