

# 水口钳

447/1HPP-H



## 配置文件

**Premium** 


### 特性



- 材料：铬钒
- 淬火，完全淬火与回火
- 工作表面经淬火
- 表面处理：依据ISO 1456:2009标准
- 重型双成分材料手柄

### 规格

- 符合EN 1675-1标准
- 不可拆卸连接金属
- 每个工具上都印有工具重量
- 工具上的开口大，可以容纳粗管
- Uniort用于高空作业的工具被设计成保留工具的基本功能、人体工程学和效用，或者尽可能减少它的附加功能。
- 符合EN 1675-1标准
- 重量10.5kg
- 极度握力：手柄的形状和形状（尽管重量）使其可以更好的握持工件，从而确保安全、安全和高效。
- 操作：由于其重量，钳子可以在难以触及的位置进行手工操作。

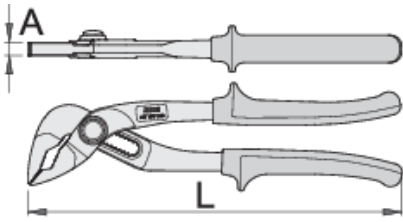- 人体工程学：把手□□舒适，提高工作效率和安全性。




	L	A	Omax	
626343	240	8,5	40	406

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.


## 用途 (pictures)




The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.




The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

## Safety tips



- Always change tools in secure areas



- Don't use tools without attaching them to

where there is no risk of falling tools.

- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.

your work belt when working at height.

- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

## Safety (pictures)



## Frequently asked questions

### Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

### Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring