

Kliješta univerzalna, žljebasta

445/4G



Profili



Standardi

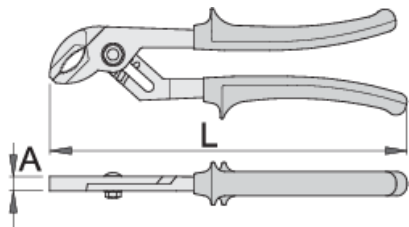
DIN ISO 8976



Atributi proizvoda

- materijal: poseban alatni čelik
- kovana, potpuno poboljšana i ojačana
- završna obrada čeljusti: fino brušenje
- završna obrada: fosfatiranje po standardu DIN12476
- robusne plastične navlake za ručke
- izrađeno po standardu ISO8976

Prednosti:

- podešavanje otvora čeljusti u 5 položaja (za dim. 180 i 240) i 6 položaja (za dim. 300)
- nažljebljeni zglobovi



	L	A	Omax	
608690	180	9.9	25	197
620558	240	10.8	35	417
608692	300	12.2	40	657

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)

