

# Waterpomptang "HYPO"

442/1HYPO



## Profielen

---

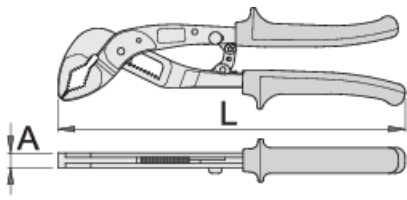




## Product attributen

- materiaal: premium chroom vanadium staal
- working surfaces induction hardened
- surface finish: chrome plated according to ISO 1456:2009
- heavy duty double - component handles
- drop forged, entirely hardened and tempered

## Voordelen:

- The Hypo pliers are self-adjusting for which it is not necessary to preset the width of the jaws.
- one hand self-adjusting operation
- The pliers adapt perfectly to the work piece.
- maximum jaw aperture up to Ø40 mm.
- The locking mechanism enables easier storage when the pliers are not in use.



	L	A	Omax	
616727	180	9.5	33	201
611780	240	9	40	397

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

### Gebruik (Afbeeldingen)

