

# Estrattore con tre bracci regolabili

682/2




## Profili



## Attributi del prodotto

- materiale: corpo in acciaio al carbonio plus flex premium, bracci in acciaio al cromo vanadio premium
- forgiata, interamente bonificata
- finitura superficiale: cromata ISO 1456:2009 - vite: forgiata

- bracci regolabili in due posizioni
- la leva di azionamento si aggancia fermamente sotto la parte da rimuovere



Barcode	No	L↑	D↑	I <sub>F</sub> max→	I <sub>t</sub> max→	M	S	Icon
612604	0	90	90	25	2.5	M 10 x 1	13	305
601767	1	130	160	40	4	M 14 x 1,5	17	1725
601768	2	190	230	50	5	M 20 x 2	22	2570
601769	3	250	300	80	8	M 22 x 2	24	5100

\* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

## Utilizzo (pictures)




## Parti di ricambio



Braccio

## Safety (pictures)

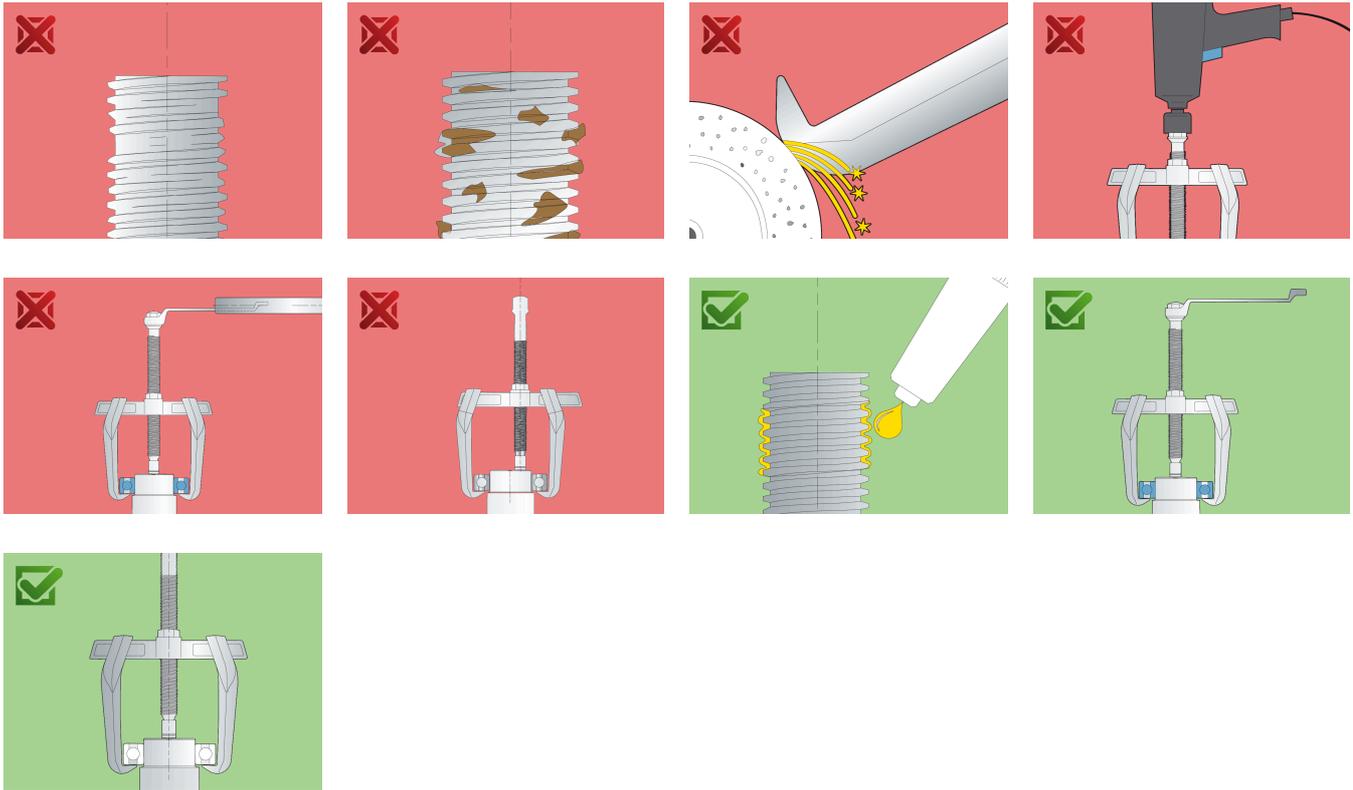

## Frequently asked questions

### **Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?**

It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

### **One arm broke. Do I have to replace all the arms or just the broken one?**

It is necessary to change all the arms.