

# Sečice kose, višenamjenske

462/1VDEBI



## Profili




## Atributi proizvoda

- materijal: poseban alatni čelik
- kovana, potpuno poboljšana i ojačana
- rezni rubovi induktivno kaljeni
- čeljusti polirane
- završna obrada: kromiranje po standardu ISO 1456:2009
- robusne ručke izolirane dvokomponentnim navlakama
- izrađeno po standardu EN IEC 60900

## Prednosti:

- skidanje izolacije električnih kablova 1,5 mm<sup>2</sup> i 2,5mm<sup>2</sup>

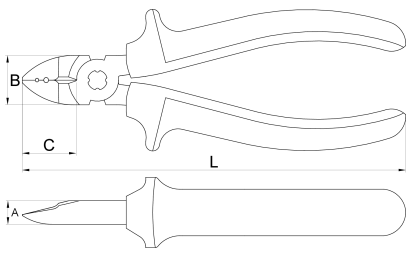

	L	B	A	C	
624060	160	21	10	22	214

kapacitet sečenja (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
624060	160	1,6	2,5

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.