

# Çok fonksiyonlu yan keski

462/1VDEDP



## Profiles



## Product features


- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlar endüksiyonla sertleştirilmiştir
- başlık cilalıdır
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- EN IEC 60900 standardına göre yapılmıştır

## Avantajları:

- Tek iletken izoleli kablo soyma 1,5 mm<sup>2</sup> and 2,5mm<sup>2</sup>
- saplar ek emniyet için çift katmanlı - çift renki yalıtımla yalıtılmıştır

## Önemli!

- ikinci katmanın görünmesi halinde, VDE aletinizi yenisiyle değiştirin

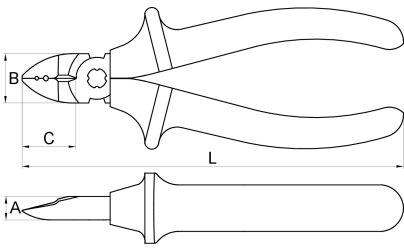

	L	B	A	C	
624061	160	21	10	22	224

cutting capacity

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
624061	160	1,6	2,5

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

## Frequently asked questions

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.