

Yan keskili ve boru ayarlı, eğri kargaburun penseler

512/4G




Profiles



Product features

- malzeme: özel alet çeliği
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- kesici ağızlı endüksiyonla sertleştirilmiş
- başlık yüzey bitirme: ince taşlanmış
- yüzey bitirme: ISO 9717 standardına göre fosfat kaplamalı
- kavrama yüzeyi tırtıllıdır
- 45° açılı eğri çene
- ağır hizmet tipi plastik saplar
- uzun eğri çeneler, somunların ve vidaların kolay ve hassas bir şekilde tutulmasını sağlar
- güçlü çeneler iyi bir kavrama sağlar

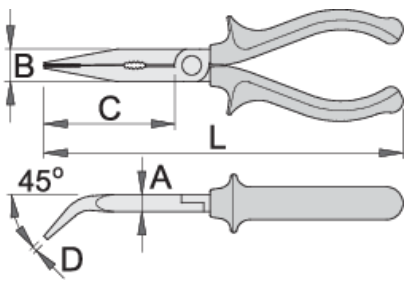


Barcode	L	B	D	A	C	Weight
608720	170	17	2.5	9	61	152
608721	200	17	2.5	9	77	204

kesme kapasitesi (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
608720	170	1,6	2,0
608721	200	1,8	2,5

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Usage (pictures)



Frequently asked questions

The head profile on the screw has deformed to such an extent that it cannot be unscrewed with a screwdriver. Which Unior tool can be used in this case?
 407/4DP screw pliers are the best choice for unscrewing screws with a damaged head profile.