


- 更佳的握持 - 把手的握持和形状可以在使用过程中为手提供更高的杠杆效率，提供更好的稳定性和力的安全。
- 高耐用性
- 多开口可防止滑动，并能提供更好的握持、咬合等。

用途:

- 剥除直径2.2mm至3.0mm的绝缘层
- 剥除直径3.5mm至4.0mm的绝缘层
- 剥离直径2.2mm至3.0mm的绝缘层
- 剥离直径3.5mm至4.0mm的绝缘层
- 切断直径2.2mm至4.0mm的导线
- 可连接最大直径4.0mm的接线端子

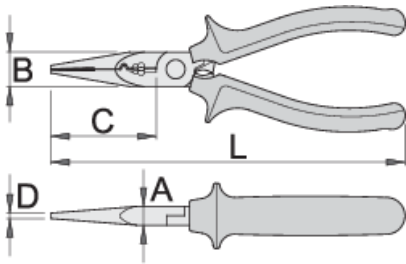

Barcode	L	A	B	C	D	Weight
626259	160	9	16	49	2,5	148

cutting capacity (10N=1kg)

Barcode	L	max 1600 N/mm ² Ø↑	max 650 N/mm ² Ø↑
626259	160	1,6	2,0

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



The carabiner on the lanyard is attached to the ring on the tool. The rings on the tools are large enough to accept 2 carabiners.




The carabiner on the lanyard has to be protected against opening using a lock ring.



Before removing the tool from the belt, unscrew the lock ring on the carabiner on the belt.



Open the carabiner on the belt and remove the tool, which is attached to a lanyard, from the carabiner on the belt. The tool is now ready for use.



Correct attachment of the tool to the lanyard. Return the tool to the belt following the steps in reverse order.



Using the socket remover (Article 1111) depress the pin in the hole while removing the socket from the square drive of the ratchet and then switch the socket or extension.

Safety tips



- Always change tools in secure areas where there is no risk of falling tools.
- Always use tools with Unior carabiners and never use carabiners with a diameter less than 6mm.
- Tools being used at height should regularly be checked for damage and that there is no damage to lanyards, carabiners, attachment rings or belts.



- Don't use tools without attaching them to your work belt when working at height.
- Don't use and fix damaged tools.
- Don't exceed maximum weight of 2.3kg for individual tools that a worker can attach to their belt.

Safety (pictures)



Frequently asked questions

Can we use a tool for working at height as a normal tool?

A tool for working at height has the same usability as a normal tool, except that a non-removable riveted metal buckle is added to this tool.

Does the stated weight per tool for safe work at height also include the weight of the metal ring?

The weight of the tool marked on the tool, included also weight of metal ring